



Superior Steamshower Systems

**Headquarters & Technical Support**

1958 Steam Way, Round Rock, TX 78665 – (800) 776-0711

<http://www.thermasol.com>

# Speaker Installation Instructions

## Speaker specifications

- Impedance, 4 Ohms
- 100Hz ~ 20k Hz response frequency
- 40 Watt Max Input, 20 Watt Rated input

## Parts Enclosed:

- 2 – 4” full range speakers
- 8 – # 8 x 1” Mounting screws
- 9.0-10.5 feet speaker wire patch cables




## Material Needed:

- 4” hole saw bit (or tile cutting bit)
- Drill
- Phillips screw driver
- Wire strippers
- Other Tools as required

***Warning: Ensure that all-existing electrical wiring and plumbing is clear before drilling any holes to mount speakers.***

1. "Use drawing below to assist in mounting your ThermaSol speakers.
2. Mark hole centers by using dimensions from drawing below.
3. Follow the notes & dimensions on the drawing below.

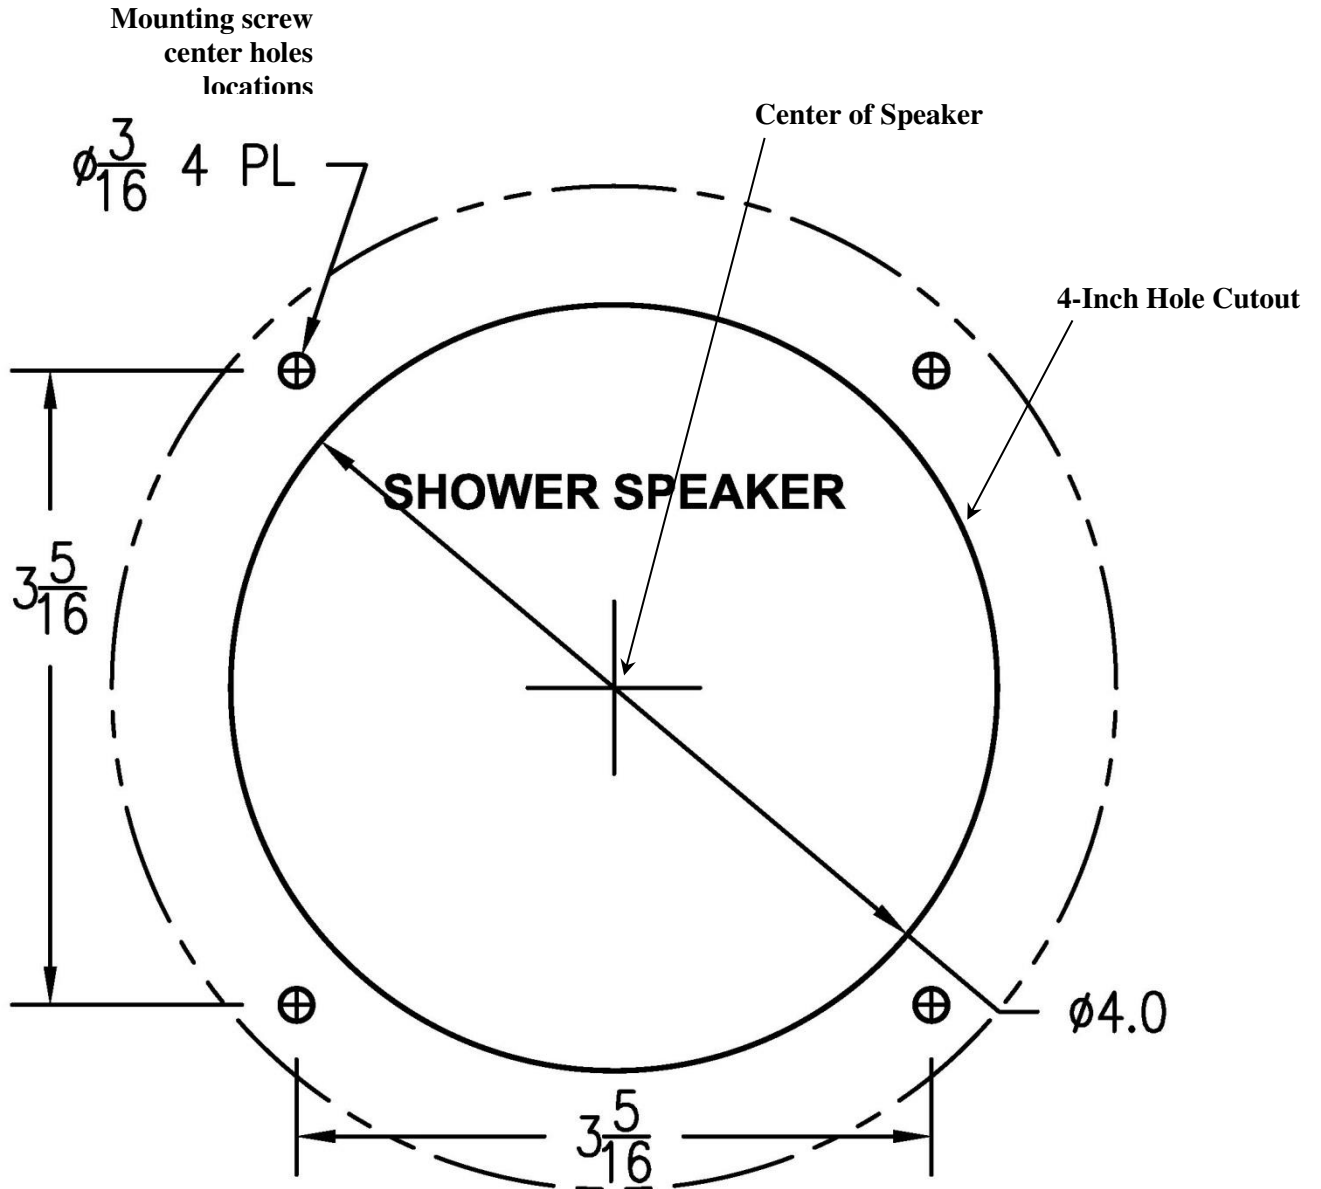

TEMPLATE\_REV\_C.DWG

**SHOWER SPEAKER DIMENSIONS  
NOT TO SCALE**