

Wood burning heater Harvia Pro 20 black

WK200

The Harvia 20 Pro stove is designed for vigorous bathing in medium- sized saunas. The stove has a large stone compartment and steel upper grating. The fire glowing behind the cast-iron-framed glass door adds to the ambience of the sauna. The sturdy 10-millimetre- thick fire chamber cover ensures durability. The model also features adjustable feet to facilitate installation. They can be used, for example, to adjust the height of the smoke outlet. The stove can be equipped with a pipe model water heater. The outer casing of the stove is painted graphite black.



Features

Main material : Steel

H x W x D : 760.0 x 430.0 x 510.0 mm

Net weight (kg) : 58.0

Stone amount (kg) : 40.0

| ID | GTIN | Power | Sauna room size min - max m3 |
|-------|---------------|---------|------------------------------|
| WK200 | 6417659001021 | 24.1 kW | 8.0-20.0 |

Related products



WL100



WL100


Spare parts

| Product | ID | Pcs |
|---------------------------------|-----------|-----|
| Furnace grate | ZKIP-10 | 1 |
| Connection pipe | ZKIP-130 | 1 |
| Ashpan RST Pro | ZKIP-721 | 1 |
| Hinge pin | ZKIP-50 | 1 |
| Frame with parts for WK200 | ZROST-300 | 1 |
| Handle for stove + screws | ZKIP-670 | 1 |
| Air flow spoiler Pro 2019 | ZROST-601 | 1 |
| Glass for stove door 184*210 mm | ZTS-36 | 1 |

Technical details

| Technical data | Type / attribute | WK200 |
|------------------------------------|--|-----------|
| | Color | Black |
| | Power output | 24.1 kW |
| | Stone sizes | 10-15 cm |
| | Stone amount (kg) | 40 |
| Dimensions | Product width (mm) | 430 |
| | Product height (mm) | 760 |
| | Product depth (mm) | 510 |
| | Net weight (kg) | 58 |
| | Gross weight | 62.3 |
| | Package width | 580 |
| | Package height | 780 |
| | Package depth | 470 |
| Connections | Flue connection locations | Back, Top |
| | Chimney connection diameter | 115 |
| Safety and installation dimensions | Safety distance front (non-combustible materials) | 300 |
| | Safety distance front (combustible materials) | 300 |
| | Safety distance right side (combustible materials) | 300 |
| | Safety distance right side non-combustible materials | 100 |
| | Safety distance left side (combustible materials) | 300 |
| | Safety distance left side non-combustible materials | 100 |
| | Safety distance behind (non-combustible materials) | 100 |
| | Safety distance behind (combustible materials) | 300 |
| | Safety distance (Ceiling) (depends on connections and therefore from output, star/delta) | 1300 |
| | Room min. height (depends on connections and therefore from output, star/delta) | 2090 |

Technical images

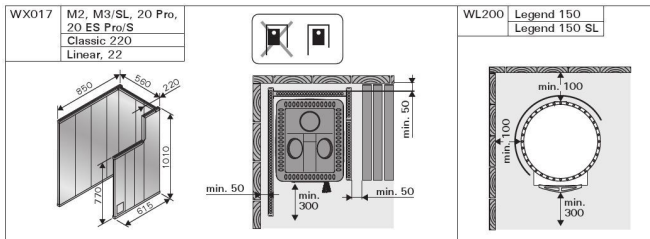

Harvia protective sheaths (all dimensions in millimeters)